

Product data sheet


Reversible plate compactor CR 3-III

Item No. 000116146



Dimensions

service weight CECE (standard)		206 [kg]
weight without extension plates		206 [kg]
weight with small extension plates		[kg]
weight with large extension plates		[kg]
working width	(W)	500 [mm]
width without extension plates	(W1)	500 [mm]
with small extension plates	(W2)	- - - [mm]
with large extension plates	(W3)	- - - [mm]
overall length	(L1)	1350 [mm]
overall height	(H1)	1060 [mm]
shipping dimension length	(L2)	815 [mm]
shipping dimension height	(H2)	1225 [mm]
length	(L3)	750 [mm]

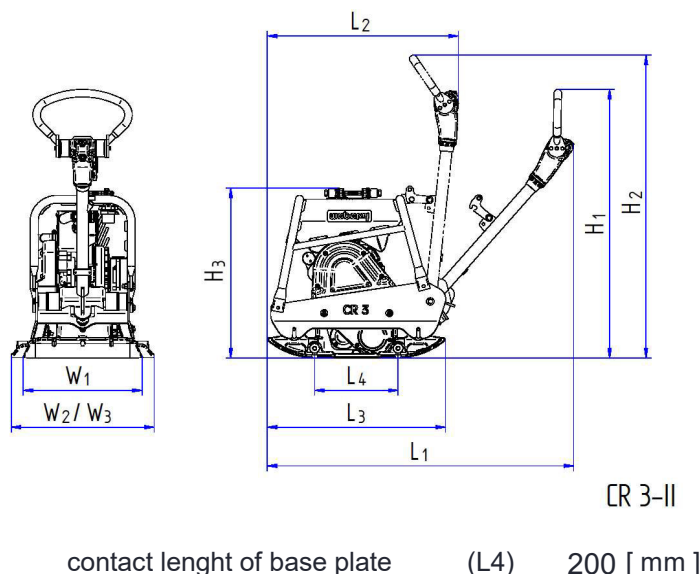

Performance

centrifugal force	35 [kN]
exit frequency	80 [Hz]
working speed	0-24 [m/min]
yardage	720 [m ² /h]
gradability	35 [%]
PQ categorie	PQ 4

Control displays

- ☐ air filter
- ☐ oil pressure
- ☐ batterie capacity
- ☐ maintainance service
- ☐ hour meter standard

Engine data

engine manufacturer	Hatz	type of combustion	Diesel 4-stroke
type of engine	1B 20	type of starter	Manual start
performance (ISO 3046-1)	3,4 [kW]	fuel consumption. (80% load	1,0 [L]
output at service r.p.m.	3,1 [kW]	fuel tank capacity	3,0 [L]
service r.p.m. of engine	3000 [1/min]	type of vibration	V-belt
automatic switch off	<input type="checkbox"/>		

Emission

sound power level Lwa	108 [dB (A)]	EU emission certificate	EU Stage V
hand-arm vibration	2,5 [m/s ²]	US emission certificate	-

Accessories

wheel kit [Item No.]	000190112	watertank - - - L [Item No.]	- - -
hour meter [Item No.]	000194105	irrigation tube [Item No.]	- - -
service kit [Item No.]	041000631		
500 [mm] polyurethane pad [Item No.]	000195633	extension plates, pair [Item No.]	
- - - [mm] polyurethane pad [Item No.]		extension plates, pair [Item No.]	
- - - [mm] polyurethane pad [Item No.]			

Product data sheet


Reversible plate compactor CR 3-III E

Item No. 000116147



Dimensions

service weight CECE (standard)		224 [kg]
weight without extension plates		224 [kg]
weight with small extension plates		[kg]
weight with large extension plates		[kg]
working width	(W)	500 [mm]
width without extension plates	(W1)	500 [mm]
with small extension plates	(W2)	- - - [mm]
with large extension plates	(W3)	- - - [mm]
overall length	(L1)	1350 [mm]
overall height	(H1)	1060 [mm]
shipping dimension length	(L2)	815 [mm]
shipping dimension height	(H2)	1225 [mm]
length	(L3)	750 [mm]

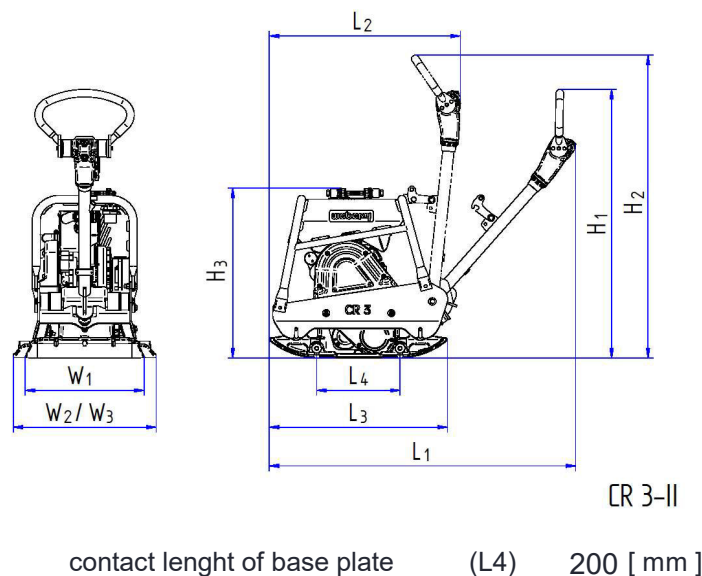

Performance

centrifugal force	35 [kN]
exit frequency	80 [Hz]
working speed	0-24 [m/min]
yardage	720 [m²/h]
gradability	35 [%]
PQ categorie	PQ 4

Control displays

- ☐ air filter
- ☐ oil pressure
- ☐ batterie capacity
- ☐ maintainance service
- ☐ hour meter standard

Engine data

engine manufacturer	Hatz	type of combustion	Diesel 4-stroke
type of engine	1B 20	type of starter	Electric start
performance (ISO 3046-1)	3,4 [kW]	fuel consumption. (80% load	1,0 [L]
output at service r.p.m.	3,1 [kW]	fuel tank capacity	3,0 [L]
service r.p.m. of engine	3000 [1/min]	type of vibration	V-belt
automatic switch off	<input type="checkbox"/>		

Emission

sound power level Lwa	108 [dB (A)]	EU emission certificate	EU Stage V
hand-arm vibration	2,5 [m/s²]	US emission certificate	- - -

Accessories

wheel kit [Item No.]	000190112	watertank - - - L [Item No.]	- - -
hour meter [Item No.]	000194105	irrigation tube [Item No.]	- - -
service kit [Item No.]	041000631		
500 [mm] polyurethane pad [Item No.]	000195633	extension plates, pair [Item No.]	
- - - [mm] polyurethane pad [Item No.]		extension plates, pair [Item No.]	
- - - [mm] polyurethane pad [Item No.]			

Product data sheet


Reversible plate compactor CR 3-III Hd

Item No. 000116148



Dimensions

service weight CECE (standard)		203 [kg]
weight without extension plates		203 [kg]
weight with small extension plates		[kg]
weight with large extension plates		[kg]
working width	(W)	500 [mm]
width without extension plates	(W1)	500 [mm]
with small extension plates	(W2)	- - - [mm]
with large extension plates	(W3)	- - - [mm]
overall length	(L1)	1350 [mm]
overall height	(H1)	1060 [mm]
shipping dimension length	(L2)	815 [mm]
shipping dimension height	(H2)	1225 [mm]
length	(L3)	750 [mm]

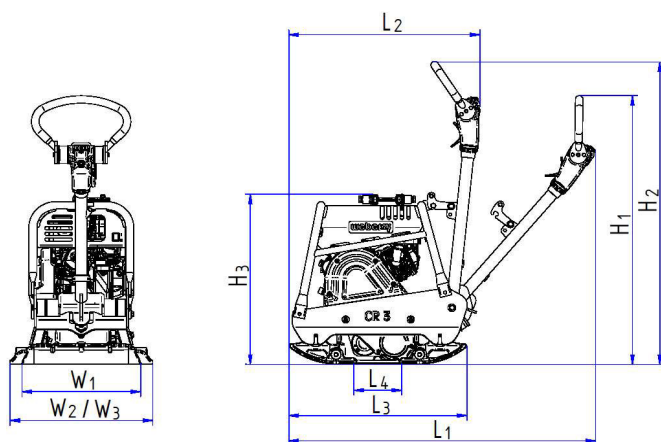

CR 3-III Hd

contact length of base plate (L4) 200 [mm]

Performance

centrifugal force	35 [kN]
exit frequency	80 [Hz]
working speed	0-24 [m/min]
yardage	720 [m²/h]
gradability	35 [%]
PQ categorie	PQ4

Control displays

- ☐ air filter
- ☐ oil pressure
- ☐ batterie capacity
- ☐ maintenance service
- ☐ hour meter standard

Engine data

engine manufacturer	Honda	type of combustion	4-stroke petrol
type of engine	GX 270	type of starter	Manual start
performance (ISO 3046-1)	6,3 [kW]	fuel consumption. (80% load	1,7 [L]
output at service r.p.m.	4,6 [kW]	fuel tank capacity	6,0 [L]
service r.p.m. of engine	3000 [1/min]	type of vibration	V-belt
automatic switch off	<input checked="" type="checkbox"/>		

Emission

sound power level Lwa	108 [dB (A)]	EU emission certificate	EU Stage V
hand-arm vibration	2,4 [m/s²]	US emission certificate	EPA 3

Accessories

wheel kit [Item No.]	000190112	watertank - - - L [Item No. - - -
hour meter [Item No.]	000194105	irrigation tube [Item No. - - -
service kit [Item No.]	041000634	
500 [mm] polyurethane pad [Item No.]	000195633	
- - - [mm] polyurethane pad [Item No.]		extension plates, pair [Item No.
- - - [mm] polyurethane pad [Item No.]		extension plates, pair [Item No.

Product data sheet


Reversible plate compactor CR 3/60

Item No. 000116150



Dimensions

service weight CECE (standard)		211 [kg]
weight without extension plates		211 [kg]
weight with small extension plates		- - - [kg]
weight with large extension plates		- - - [kg]
working width	(W)	600 [mm]
width without extension plates	(W1)	600 [mm]
with small extension plates	(W2)	- - - [mm]
with large extension plates	(W3)	- - - [mm]
overall length	(L1)	1350 [mm]
overall height	(H1)	1060 [mm]
shipping dimension length	(L2)	815 [mm]
shipping dimension height	(H2)	1225 [mm]
length	(L3)	750 [mm]

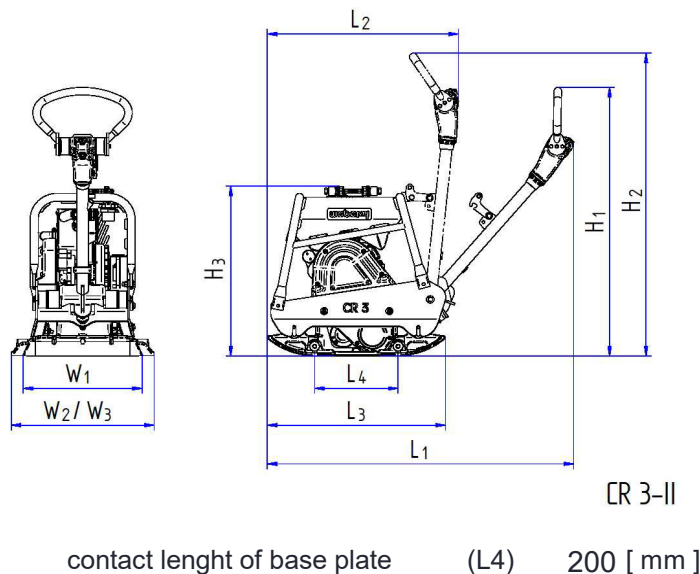

contact length of base plate (L4) 200 [mm]

Performance

centrifugal force	35 [kN]
exit frequency	80 [Hz]
working speed	0-24 [m/min]
yardage	864 [m ² /h]
gradability	35 [%]
PQ categorie	PQ 4

Control displays

- ☐ air filter
- ☐ oil pressure
- ☐ batterie capacity
- ☐ maintainance service
- ☐ hour meter standard

Engine data

engine manufacturer	Hatz	type of combustion	Diesel 4-stroke
type of engine	1B 20	type of starter	Manual start
performance (ISO 3046-1)	3,4 [kW]	fuel consumption. (80% load	1,0 [L]
output at service r.p.m.	3,1 [kW]	fuel tank capacity	3,0 [L]
service r.p.m. of engine	3000 [1/min]	type of vibration	V-belt
automatic switch off	<input type="checkbox"/>		

Emission

sound power level Lwa	108 [dB (A)]	EU emission certificate	EU Stage V
hand-arm vibration	2,5 [m/s ²]	US emission certificate	-

Accessories

wheel kit [Item No.]	000190112	watertank - - - L [Item No. - - -
hour meter [Item No.]	000194105	irrigation tube [Item No. - - -
service kit [Item No.]	041000631	
600 [mm] polyurethane pad [Item No.]	000195634	
- - - [mm] polyurethane pad [Item No.]		extension plates, pair [Item No.
- - - [mm] polyurethane pad [Item No.]		extension plates, pair [Item No.

Product data sheet


Reversible plate compactor CR 3/60 Hd

Item No. 000116152



Dimensions

service weight CECE (standard)		209 [kg]
weight without extension plates		209 [kg]
weight with small extension plates		- - - [kg]
weight with large extension plates		- - - [kg]
working width	(W)	600 [mm]
width without extension plates	(W1)	600 [mm]
with small extension plates	(W2)	- - - [mm]
with large extension plates	(W3)	- - - [mm]
overall length	(L1)	1350 [mm]
overall height	(H1)	1060 [mm]
shipping dimension length	(L2)	815 [mm]
shipping dimension height	(H2)	1225 [mm]
length	(L3)	750 [mm]

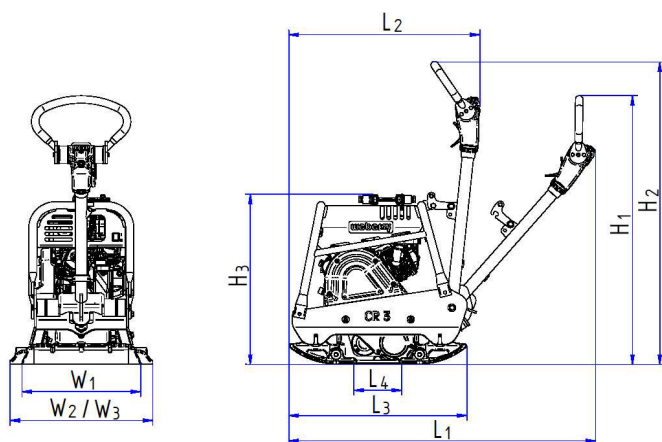

CR 3-II Hd

contact length of base plate (L4) 200 [mm]

Performance

centrifugal force	35 [kN]
exit frequency	80 [Hz]
working speed	0-24 [m/min]
yardage	864 [m²/h]
gradability	35 [%]
PQ categorie	PQ4

Control displays

- ☐ air filter
- ☐ oil pressure
- ☐ batterie capacity
- ☐ maintainance service
- ☐ hour meter standard

Engine data

engine manufacturer	Honda	type of combustion	4-stroke petrol
type of engine	GX 270	type of starter	Manual start
performance (ISO 3046-1)	6,3 [kW]	fuel consumption. (80% load	1,7 [L]
output at service r.p.m.	4,6 [kW]	fuel tank capacity	6,0 [L]
service r.p.m. of engine	3000 [1/min]	type of vibration	V-belt
automatic switch off	<input checked="" type="checkbox"/>		

Emission

sound power level Lwa	108 [dB (A)]	EU emission certificate	EU Stage V
hand-arm vibration	2,4 [m/s²]	US emission certificate	EPA 3

Accessories

wheel kit [Item No.]	000190112	watertank - - - L [Item No. - - -
hour meter [Item No.]	000194105	irrigation tube [Item No. - - -
service kit [Item No.]	041000634	
600 [mm] polyurethane pad [Item No.]	000195634	
- - - [mm] polyurethane pad [Item No.]		extension plates, pair [Item No.
- - - [mm] polyurethane pad [Item No.]		extension plates, pair [Item No.