

Product data sheet

Vibrating Rammer

SRV 300-II

Item Nr.


000170057



Dimensions

service weight CECE (standard) 32 [kg]

total width	(B)	315 [mm]
total lenght	(L)	585 [mm]
total height	(H)	950 [mm]
grip height	(H1)	920 [mm]
width of tamping shoe	(W1)	140 [mm]
width of smal tamping shoe	(W2)	95 [mm]
lenght of tamping shoe	(L1)	272 [mm]
contact lenght of tamping shoe (L2)		148 [mm]

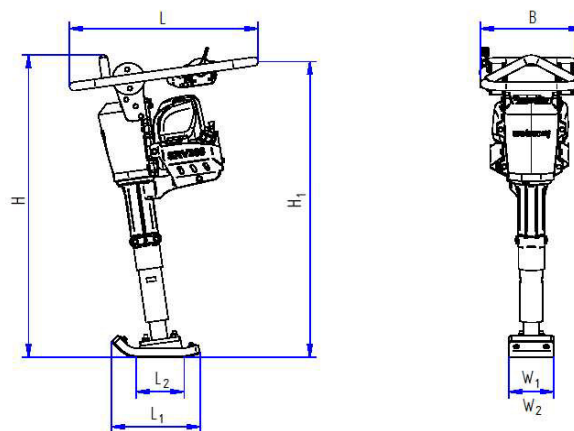

SRV300

Performance

percussion rate	790 [1/min]	stroke force	9,1 [kN]
max. stroke	45 [mm]	stroke performance	[W]
crank radius	16 [mm]	individual impact energy	28,7 [Nm or J]
working speed	16 [m/min]		
yardage	135 [m ² /h]		

Engine data

engine manufacturer	Honda	type of combustion	4-stroke petrol
type of engine	GX 50	type of starter	Manual start
performance (ISO 3046-1)	1,5 [kW]	fuel consumption (80% load)	0,7 [L/h]
output at service r.p.m.	1,5 [kW]	fuel tank capacity	0,63 [L]
service r.p.m. of engine	6900 [1/min]		
automatic switch off	☐		

Emission

sound power level Lwa	108 [dB (A)]	EU emission certificate	EU Stage V
hand-arm vibration	7,4 [m/s ²]	US emission certifikate	EPA 3

Accessories

wheel kit	[Item Nr. - - -]	☐ hour meter standard
smal tamping shoe	[Item Nr. - - -]	
extension of tamping shoe	[Item Nr. - - -]	
service kit	[Item Nr. 041001485]	