

Product data sheet

Vibrating plate compactor

CF 3-II Hd


Item Nr.

000100320



Dimensions

service weight CECE (standard)		94 [kg]
working width	(W)	500 [mm]
overall length	(L1)	1130 [mm]
overall height	(H1)	960 [mm]
shipping dimension length	(L2)	910 [mm]
shipping dimension height	(H2)	550 [mm]
length	(L3)	750 [mm]
contact length of base plate	(L4)	400 [mm]

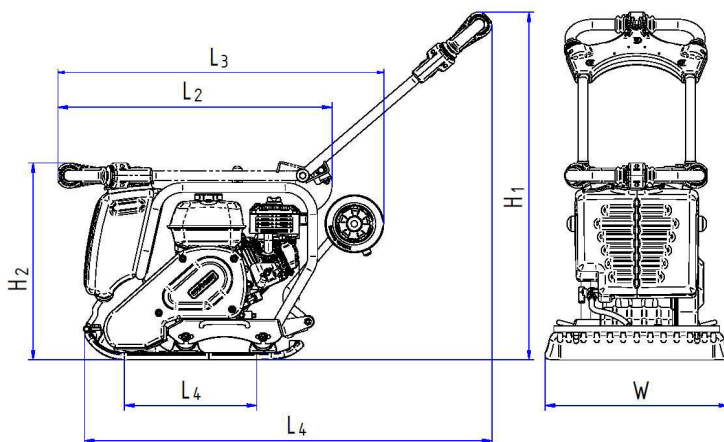

CF3-II Hd

Performance

centrifugal force	20 [kN]
exciter frequency	95 [Hz]
working speed	26 [m/min]
yardage	780 [m ² /h]
gradability	35 [%]

Control displays

☐ hour meter standard

Engine data

engine manufacturer	Honda	type of combustion	4-stroke petrol
type of engine	GX 160	type of starter	Manual start
performance (ISO 3046-1)	3,6 [kW]	fuel consumption. (80% load)	1,1 [L]
output at service r.p.m.	2,5 [kW]	fuel tank capacity	3,1 [L]
service r.p.m. of engine	3000 [1/min]	type of vibration	V-belt
automatic switch off	☒		

Emission

sound power level Lwa	105 [dB (A)]	EU emission certificate	EU Stage V
hand-arm vibration	2,4 [m/s ²]	US emission certificate	EPA 3

Accessories

wheel kit [Item Nr.	000190251	watertank 12 L [Item Nr.	000192265
hour meter [Item Nr.	000194105	irrigation tube [Item Nr.	000192271
service kit [Item Nr.	041001566	polyurethane pad [Art.-Nr.]	000195556

Product data sheet

Vibrating plate compactor

CF 3-II H


Item Nr.

000100321



Dimensions

service weight CECE (standard)		108 [kg]
working width	(W)	500 [mm]
overall length	(L1)	1130 [mm]
overall height	(H1)	960 [mm]
shipping dimension length	(L2)	910 [mm]
shipping dimension height	(H2)	550 [mm]
length	(L3)	750 [mm]
contact length of base plate	(L4)	400 [mm]

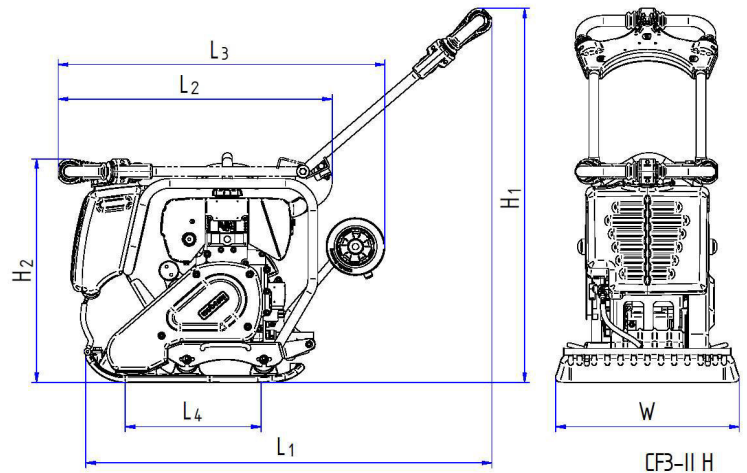

Performance

centrifugal force	20 [kN]
exciter frequency	95 [Hz]
working speed	26 [m/min]
yardage	780 [m ² /h]
gradability	35 [%]

Control displays

☐ hour meter standard

Engine data

engine manufacturer	Hatz	type of combustion	Diesel 4-stroke
type of engine	1B 20	type of starter	Manual start
performance (ISO 3046-1)	3,4 [kW]	fuel consumption. (80% load)	1,0 [L]
output at service r.p.m.	3,1 [kW]	fuel tank capacity	3,0 [L]
service r.p.m. of engine	3000 [1/min]	type of vibration	V-belt
automatic switch off	☐		

Emission

sound power level Lwa	105 [dB (A)]	EU emission certificate	EU Stage V
hand-arm vibration	2,4 [m/s ²]	US emission certificate	

Accessories

wheel kit [Item Nr.	000190251	watertank 12 L [Item Nr.	000192265
hour meter [Item Nr.	000194105	irrigation tube [Item Nr.	000192271
service kit [Item Nr.	041001567	polyurethane pad [Art.-Nr.]	000195556

Product data sheet

Vibrating plate compactor

CF 3/60 Hd


Item Nr.

000100322



Dimensions

service weight CECE (standard)		107 [kg]
working width	(W)	600 [mm]
overall length	(L1)	1130 [mm]
overall height	(H1)	960 [mm]
shipping dimension length	(L2)	910 [mm]
shipping dimension height	(H2)	580 [mm]
length	(L3)	750 [mm]
contact length of base plate	(L4)	400 [mm]

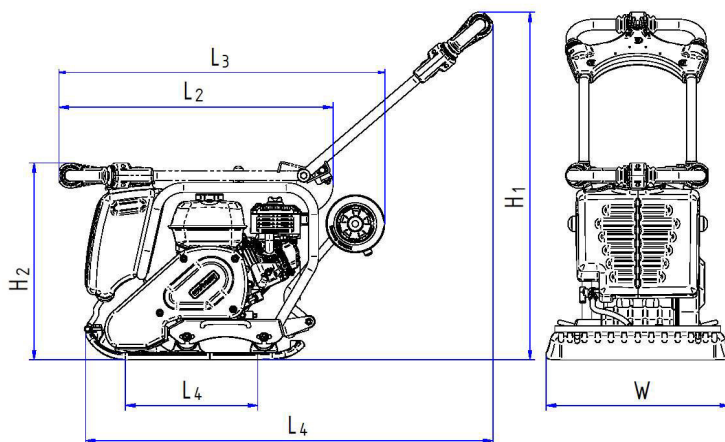

CF3-II Hd

Performance

centrifugal force	20 [kN]
exciter frequency	95 [Hz]
working speed	26 [m/min]
yardage	780 [m ² /h]
gradability	35 [%]

Control displays

☐ hour meter standard

Engine data

engine manufacturer	Honda	type of combustion	4-stroke petrol
type of engine	GX 160	type of starter	Manual start
performance (ISO 3046-1)	3,6 [kW]	fuel consumption. (80% load)	1,1 [L]
output at service r.p.m.	2,5 [kW]	fuel tank capacity	3,1 [L]
service r.p.m. of engine	3000 [1/min]	type of vibration	V-belt
automatic switch off	☒		

Emission

sound power level Lwa	105 [dB (A)]	EU emission certificate	EU Stage V
hand-arm vibration	2,4 [m/s ²]	US emission certificate	EPA 3

Accessories

wheel kit [Item Nr.	000190251	watertank 12 L [Item Nr.	000192265
hour meter [Item Nr.	000194105	irrigation tube [Item Nr.	000192272
service kit [Item Nr.	041001566	polyurethane pad [Art.-Nr.]	000195557

Product data sheet

Vibrating plate compactor

CF 3/60 H


Item Nr.

000100323



Dimensions

service weight CECE (standard)		122 [kg]
working width	(W)	600 [mm]
overall length	(L1)	1130 [mm]
overall height	(H1)	960 [mm]
shipping dimension length	(L2)	910 [mm]
shipping dimension height	(H2)	650 [mm]
length	(L3)	750 [mm]
contact length of base plate	(L4)	400 [mm]

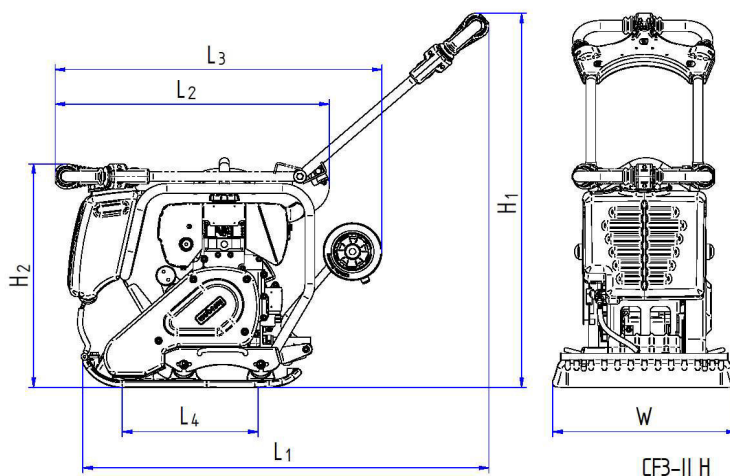

Performance

centrifugal force	20 [kN]
exciter frequency	95 [Hz]
working speed	26 [m/min]
yardage	780 [m ² /h]
gradability	35 [%]

Control displays

☐ hour meter standard

Engine data

engine manufacturer	Hatz	type of combustion	Diesel 4-stroke
type of engine	1B 20	type of starter	Manual start
performance (ISO 3046-1)	3,4 [kW]	fuel consumption. (80% load)	1,0 [L]
output at service r.p.m.	3,1 [kW]	fuel tank capacity	3,0 [L]
service r.p.m. of engine	3000 [1/min]	type of vibration	V-belt
automatic switch off	☐		

Emission

sound power level Lwa	105 [dB (A)]	EU emission certificate	EU Stage V
hand-arm vibration	2,4 [m/s ²]	US emission certificate	

Accessories

wheel kit [Item Nr.	000190251	watertank 12 L [Item Nr.	000192265
hour meter [Item Nr.	000194105	irrigation tube [Item Nr.	000192272
service kit [Item Nr.	041001567	polyurethane pad [Art.-Nr.]	000195557